
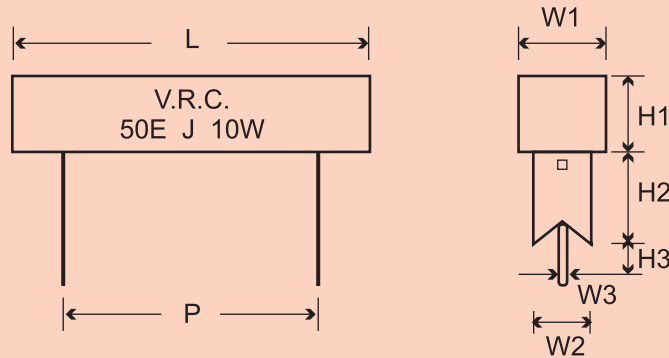


# WIRE WOUND RESISTORS (VCR L - Series)

VAIBHAV RESISTORS CO. **VRC**

WIRE WOUND RESISTORS


- 3W to 20W
- Flame proof
- 0.1E to 10K
- Choice of PCB terminal stand-off height which are adaptable to wave soldering



Dimensions (in mm)

Type	Watt	L ±1.5	W ±1	Lead ld	Lead dia	Resistance Value
VCR-L3	3W	15.0	7.0	28.0	0.8	0.1 - 1K
VCR-L5	5W	21.0	9.0	32.0	0.8	0.1 - 10K
VCR-L10	10W	45.0	9.0	32.0	1.0	0.1 - 22K
VCR-L15	15W	50.0	12.0	35.0	1.2	0.1 - 33K
VCR-L20	20W	65.0	12.0	35.0	1.2	0.1 - 100K
VCR-L25	25W	75.0	12.0	35.0	1.2	0.1 - 100K

Power Derating Curve

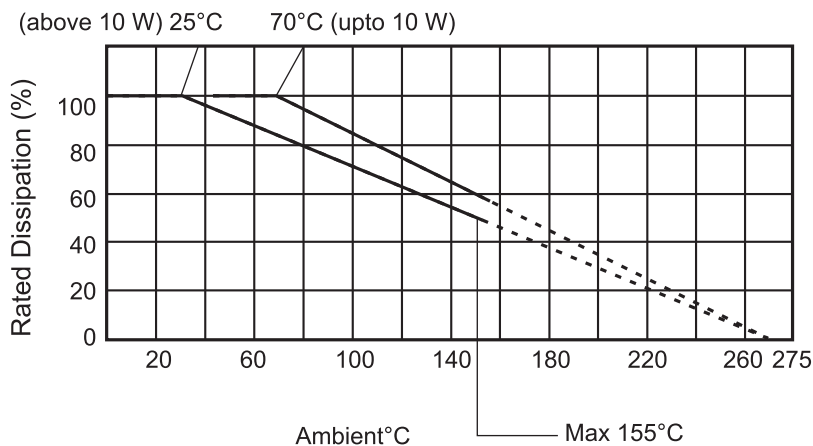

Note: Customised variations available on request.